




SC/PC

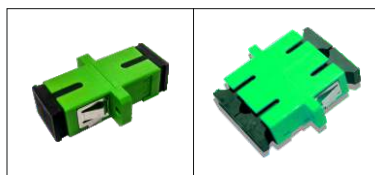

SC/APC

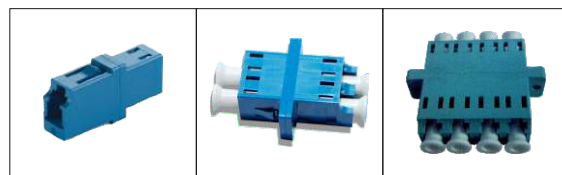


LC/PC

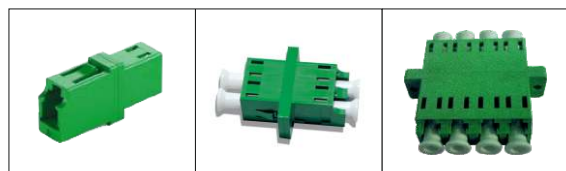

LC/APC



E2000/PC



E2000/APC



FC



ST



MPO

Features

- ❖ Low Insertion Loss
- ❖ Compliant with Telcordia GR-326-Core
- ❖ High Precision of Mechanical Dimensions
- ❖ RoHS Compliance
- ❖ Available Ceramic or PB Sleeves
- ❖ Simplex, duplex & quad type
- ❖ With Flange & without Flange

Application

- ❖ Patchpanel and wall box connection interface
- ❖ FTTx Deployments
- ❖ Preterminated assembly interconnection
- ❖ Telecoms, CATV, LAN & WAN
- ❖ Test & Measurement set up

Specifications

Parameters	
IL values @ 1310 & 1550nm	0.1dB
Durability	1000
Operating Temperature	-40°C - +85°C