



Part No	Description
PC5UMC1BLP	UTP Cat.5e Patch Cord, Molded, Boot C, Blue, 1M
PC5UMC1RDP	UTP Cat.5e Patch Cord, Molded, Boot C, Red, 1M
PC5UMC1YLP	UTP Cat.5e Patch Cord, Molded, Boot C, Yellow, 1M
PC5UMC1GYP	UTP Cat.5e Patch Cord, Molded, Boot C, Grey, 1M

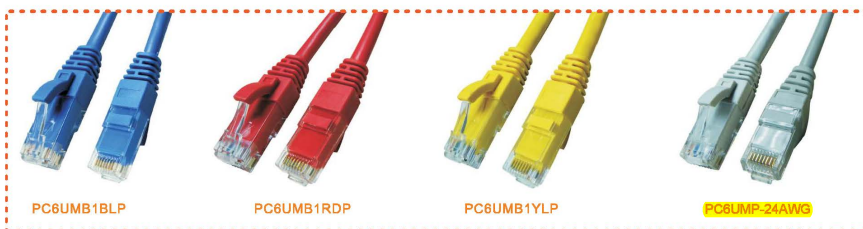

Part No	Description
PC6UMB1BLP	UTP Cat.6 Patch Cord, Molded, Boot B, Blue, 1M
PC6UMB1RDP	UTP Cat.6 Patch Cord, Molded, Boot B, Red, 1M
PC6UMB1YLP	UTP Cat.6 Patch Cord, Molded, Boot B, Yellow, 1M
PC6UMP-24AWG-1M	UTP Cat.6 Patch Cord, Molded, Boot B, Grey, 1M

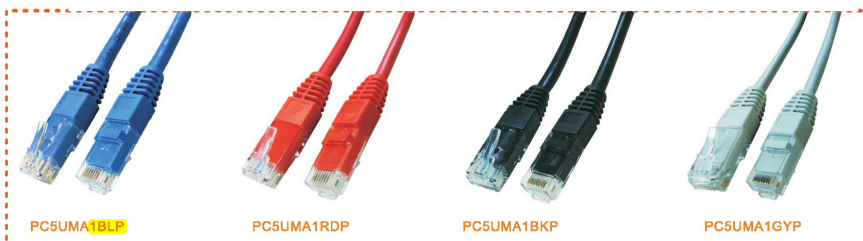

Part No	Description
PC5UMA1BLP	UTP Cat.5e Patch Cord, Molded, Boot A, Blue, 1M
PC5UMA1RDP	UTP Cat.5e Patch Cord, Molded, Boot A, Red, 1M
PC5UMA1BKP	UTP Cat.5e Patch Cord, Molded, Boot A, Black, 1M
PC5UMA1GYP	UTP Cat.5e Patch Cord, Molded, Boot A, Grey, 1M

CAT.5E&CAT.6 PATCH CORD CLEAR BOOT

The Difference is Clear

ClearBoot patch cables available in Cat 6 and Cat 5e
 Low profile connector for easy fit in panels & switches
 Unique easy-release, snagless retainer clip design
 EIA/TIA T568A, T568B, CROSS-OVER connecting way optional
 10 vibrant color options
 Individually tested, packed and guaranteed a lifetime
 PVC and LSOH Jacket optional
 Different Length from 0.3m, 1m, 2m, 45m optional

Order Information for Cat5e:

P/N	Cable Type	Cable AWG	Cable Color	Cable Length	Connecting Way
PCSUCL-1PK	UTP	26AWG or 24AWG	Pink	1m	T568A
PCSUCL-1RD			Red	1m	
PCSUCL-1GN			Green	1m	
PCSUCL-1BK			Black	1m	
PCSUCL-1WH			White	1m	T568B
PCSUCL-1LB			Light Blue	1m	
PCSUCL-1GY			Grey	1m	Crossover
PCSUCL-1BL			Blue	1m	
PCSUCL-1OR			Orange	1m	
PCSUCL-1YL			Yellow	1m	
PCSUCL-1PL	Purple	1m			



Order Information for Cat6:

P/N	Cable Type	Cable AWG	Cable Color	Cable Length	Connecting Way
PC6UCL-1PK	UTP	26AWG or 24AWG	Pink	1m	T568A
PC6UCL-1RD			Red	1m	
PC6UCL-1GN			Green	1m	
PC6UCL-1BK			Black	1m	
PC6UCL-1WH			White	1m	T568B
PC6UCL-1LB			Light Blue	1m	
PC6UCL-1GY			Grey	1m	Crossover
PC6UCL-1BL			Blue	1m	
PC6UCL-1OR			Orange	1m	
PC6UCL-1YL			Yellow	1m	
PC6UCL-1PL	Purple	1m			

CAT.5E&CAT.6 FLAT CORD

Specification:

- Flat cables have stranded copper conductors for flexibility-great for frequent changes that occur at the wall outlet or patch panel.
- Available with Standard boot or Snagless boot.
- 32AWG stranded UTP CAT6.
- Cable width: 0.24".
- Wired straight through.
- 50 micron gold plated contacts.
- Complies with TIA/EIA 568B standard.
- Tested to 350Mhz using a Fluke DTX-1800 Cable Analyzer.
- Shield: UTP or STP with pair shielding.



Order Information:

Category	FPC <input type="checkbox"/>	Shielding <input type="checkbox"/>	Style <input type="checkbox"/>	Boot <input type="checkbox"/>	Length <input type="checkbox"/>	Color <input type="checkbox"/>	Jacket <input type="checkbox"/>
5: Cat.5e	U: UTP		M: Molded	A	1:1M	BK: Black	P: PVC
6: Cat.6	F: FTP		E: Bootless	B	2:2M	WH: White	L: LSZH
7: Cat.7	SF: SFTP			C	3:3M	RD: Red	
	SS: SSTP			D	GN: Green	
				E		BL: Blue	
				F		YL: Yellow	
						GY: Grey	
						IV: Ivory	
						OR: Orange	