

CAT.6 LAN CABLE

Application:







- 100Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T (Gigabit Ethernet)
- 155 Mbps ATM
- 622Mbps ATM

Product Description:

- Rated temperature: 60°C, 75°C
- Reference Standard: TIA/EIA568B IEO/ISO11801
- Bare solid or stranded copper conductor
- Color-coded PE insulation
- Zip cord (optional)
- Lead free PVC or LSZH jacket
- Flammability grade: CMX, CM, CMG, CMR, CMP
- UL, ETL verified
- Reellex Pull-out Box packing

Specification:

- Lan cables are suitable for perfect audio, data & video of transfer for local area network
- 4Pair Per 1000FT(305M)
- Various color and length at option

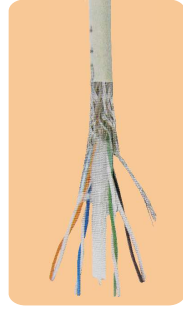


Order Information:

LC	Shielding	Construction	Conductor	Color	Jacket
5: Cat.5e	U: UTP	S: Solid	24: 24AWG	BK: Black	P: PVC
6: Cat.6	F: FTP	T: Stranded	23: 23AWG	WH: White	L: LSZH
8: Cat.6A	SF: SFTP		26: 26AWG	RD: Red	
7: Cat.7	SS: SSTP		28: 28AWG	GN: Green	
3: Cat.3				BL: Blue	
4: Cat.3 25pair				YL: Yellow	
				GY: Grey	
				IV: Ivory	
				OR: Orange	

CAT.6A & CAT.6 PATCH CORD


Application:

- Patch cord is used in network application such as 10Base-T, 100Base-T, 1000Base-T ethernet technology to 100meters, and have been designed specifically for Gigabit ethernet applications (Gigabit over copper).
- They perform at high-data transfer rates, and work with ATM and gigabit speed products.
- Ideal for connecting Computers, Hubs, Switches, Printer servers, Patch panels, etc.

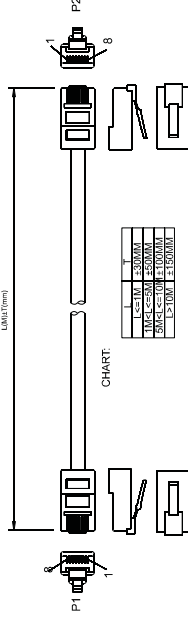

Specification:

- Meet ANSI/TIA/EIA 568B.2
- UL, ETL verified, 100 tested.
- Plug: 3-50 micro inches gold plating on contact area.
- RJ45, RJ11 Plugs are available
- Boot Types: A, B, C, D, E, F, G
- Different length and colors are available

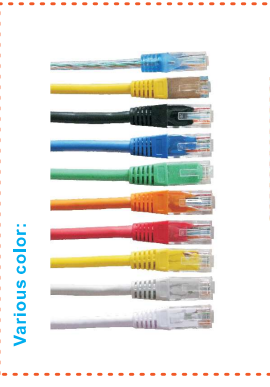

Bootless Patch cord:



Boot types:



Order Information:

PC	Shielding	Style	Boot	Length	Color	Jacket
5: Cat.5e	U: UTP	M: Molded	A	1-1M	BK: Black	P: PVC
6: Cat.6	F: FTP	E: Bootless	B	2-2M	WH: White	L: LSZH
8: Cat.6A	SF: SFTP		C	3-3M	RD: Red	
7: Cat.7	SS: SSTP		D	GN: Green	
			E		BL: Blue	
			F		YL: Yellow	
			G		GY: Grey	
					IV: Ivory	
					OR: Orange	

